


## Model 411 Suction Line Filter Driers

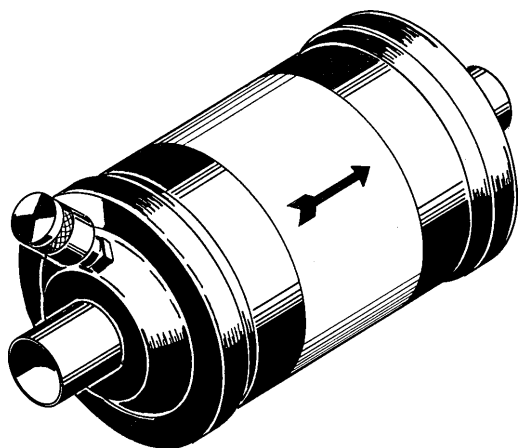


### Features

- Maximum protection against contamination and motor burn-out
- Low pressure drop AND high-acid and moisture capacity
- Largest selection available for convenience and safety
- Ragged shock resistant internal design
- Convenient inlet pressure tap for service access
- Designed for easy, permanent installation
- Corrosion resistant paint
- UL listed
- Compatible with our full line of expansion valves

### Specifications

Device Number	Desiccant Volume (Cubic In.)	Filter Area (Sq. In.)	Connection		Body Diameter (In.)	Lay-In Length (In.)	Units Weight (Lbs.)	Units Per Case
			Size	Type				
411-083	8	21	3/8	Flare	2.5	6.15	1.55	30
411-483S	8	21	3/8	Sweat	2.5	4.72	1.39	30
411-084	8	21	1/2	Flare	2.5	6.46	1.59	30
411-084S	8	21	1/2	Sweat	2.5	4.83	1.45	30
411-085	8	21	5/8	Flare	2.5	6.78	1.63	30
411-085S	8	21	5/8	Sweat	2.5	4.94	1.47	30
411-086S	8	21	3/4	Sweat	2.5	4.67	1.47	30
411-164	16	33	1/2	Flare	3.0	7.05	2.23	20
411-164S	16	33	1/2	Sweat	3.0	5.20	2.21	20
411-165	16	33	5/8	Flare	3.0	7.37	2.39	20
411-165S	16	33	5/8	Sweat	3.0	5.22	2.28	20
411-166S	16	33	3/4	Sweat	3.0	5.20	2.30	20
411-167S	16	33	7/8	Sweat	3.0	5.33	2.31	20
411-305S	30	53	5/8	Sweat	3.0	8.12	3.24	16
411-306S	30	53	3/4	Sweat	3.0	8.12	3.24	16
411-307S	30	53	7/8	Sweat	3.0	8.25	3.25	16
411-309S	30	53	1 1/8	Sweat	3.0	8.25	3.30	16
411-417S	41	67	7/8	Sweat	3.5	8.25	4.50	12
411-419S	41	67	1 1/8	Sweat	3.5	8.25	4.56	12
411-487S	48	64	7/8	Sweat	4.5	8.24	7.28	6
411-489S	48	64	1 1/8	Sweat	4.5	7.98	7.34	6
411-4811S	48	64	1 3/8	Sweat	4.5	7.71	7.42	6
411-4813S	48	64	1 5/8	Sweat	4.5	7.17	7.48	6
411-607S	60	106	7/8	Sweat	3.0	14.53	5.48	9
411-609S	60	106	1 1/8	Sweat	3.0	14.55	5.50	9

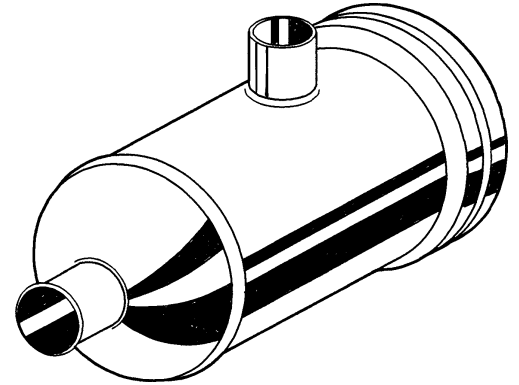

## Replacement Core Shells

Device Number	Desiccant Volume (Cubic In.)	Filter Area (Sq. In.)	Fitting		Cores Req'd	Max/Case Diameter (In.)	Overall Length (In.)	Units Weight (Lbs.)	Units Per Case
			Size	Type					
485	48	64	5/8	Sweat	1	6.1/4.5	9.63	11.1	1
487	48	64	7/8	Sweat	1	6.1/4.5	9.70	11.2	1
489	48	64	1 1/8	Sweat	1	6.1/4.5	9.78	11.2	1
4811	48	64	1 3/8	Sweat	1	6.1/4.5	9.82	11.3	1
4813	48	64	1 5/8	Sweat	1	6.1/4.5	9.80	11.4	1
967	96	128	7/8	Sweat	2	6.1/4.5	15.21	14.0	1
969	96	128	1 1/8	Sweat	2	6.1/4.5	15.29	14.1	1
9611	96	128	1 3/8	Sweat	2	6.1/4.5	15.33	14.2	1
9613	96	128	1 5/8	Sweat	2	6.1/4.5	15.31	14.6	1
1449	144	192	1 1/8	Sweat	3	6.1/4.5	20.80	17.0	1
14411	144	192	1 3/8	Sweat	3	6.1/4.5	20.84	17.1	1
14413	144	192	1 5/8	Sweat	3	6.1/4.5	20.82	17.5	1
19211	192	256	1 3/8	Sweat	4	6.1/4.5	26.35	20.3	1
19213	192	256	1 5/8	Sweat	4	6.1/4.5	26.33	20.7	1
19217	192	256	2 1/8	Sweat	4	6.1/4.5	26.31	20.4	1

## Replacement Cores

Device Number	Desiccant Volume (Cubic In.)	Filter Area (Sq. In.)	Connection		Body Diameter (In.)	Lay-In Length (In.)	Units Weight (Lbs.)	Units Per Case
			Size	Type				
48	48	64	Standard	3.75	1.75	5.50	2.0	24
48H	48	64	High Water Capacity	3.75	1.75	5.50	2.0	24

Information subject to change without notice.

7/99

## Invensys Appliance Controls

191 East North Avenue Carol Stream Illinois 60188 USA  
T +1 630 260 3400 F +1 630 260 7325 www.invensys.com