


## Bi-Directional Flow Filter Driers

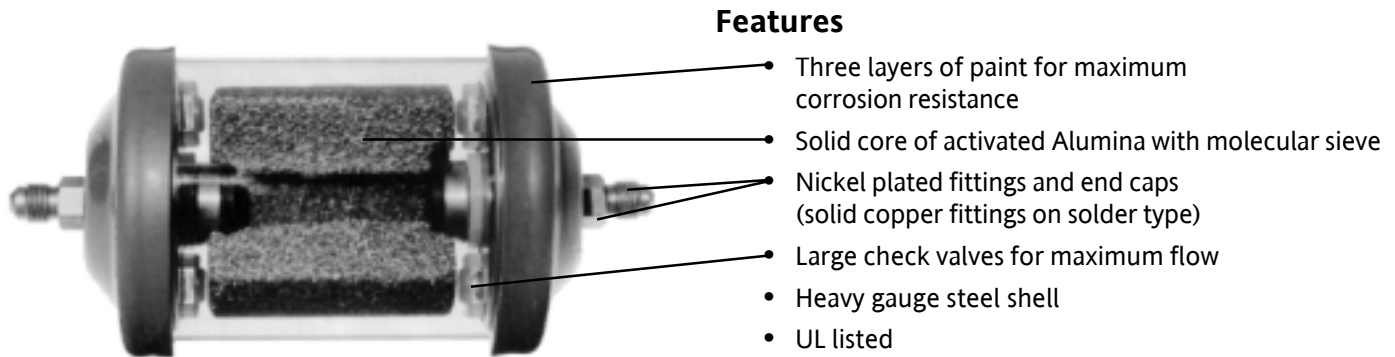

### Specifications

Device Number	Water Capacity Drops @ 125°F R-22	Flow Capacity R-22 (Tons) @2PSI+P	Connection		Body Diameter (In.)	Lay-In Length (In.)	Liquid Refrigerant Capacity by Weight Ounces of R-22	
			Size	Type			75°F	125°F
431-082F	90	3.9	1/4"	Flare	2.5	5.80	8.2	7.2
431-482S	90	3.9	1/4"	Sweat	2.5	4.28	8.2	7.2
431-083F	90	4.5	3/8"	Flare	2.5	6.14	8.2	7.2
431-083S	90	4.5	3/8"	Sweat	2.5	4.40	8.2	7.2
431-084F	90	7.3	1/2"	Flare	2.5	6.46	8.2	7.2
431-084S	90	7.3	1/2"	Sweat	2.5	4.59	8.2	7.2
431-085F	90	9.5	5/8"	Flare	2.5	6.76	8.2	7.2
431-085S	90	9.5	5/8"	Sweat	2.5	4.80	8.2	7.2
431-162F	140	3.5	1/4"	Flare	3.0	6.37	14.2	12.7
431-162S	140	3.5	1/4"	Sweat	3.0	4.85	14.2	12.7
431-163F	140	4.9	3/8"	Flare	3.0	6.73	14.2	12.7
431-163S	140	4.9	3/8"	Sweat	3.0	5.01	14.2	12.7
431-164F	140	9.8	1/2"	Flare	3.0	7.06	14.2	12.7
431-164S	140	9.8	1/2"	Sweat	3.0	5.19	14.2	12.7
431-165F	140	12.6	5/8"	Flare	3.0	7.35	14.2	12.7
431-165S	140	12.6	5/8"	Sweat	3.0	5.20	14.2	12.7