


Model GS-56 Solenoid Water Valve

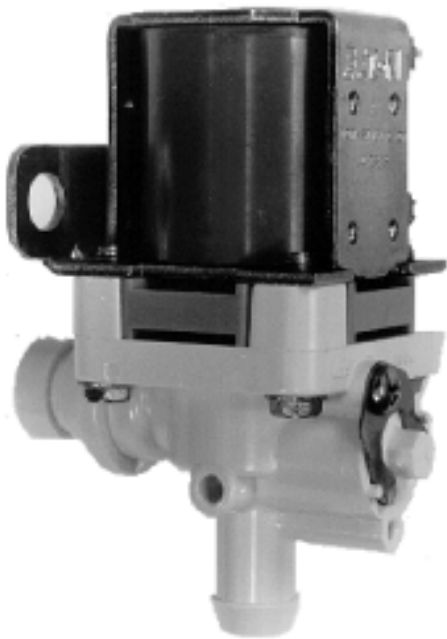



Description

The Model GS-56 was created for use in dispensing water for coffee and other hot-drink vending machines. This direct-acting, gravity-fed dump valve is capable of providing low-volume liquid flow at a minimal head pressure and a water temperature of 200°F.

Options

- Vent tube
- The external flow adjustment screw can be slotted or hex.
- Mounting bracket
- Connections other than those shown are possible on request.

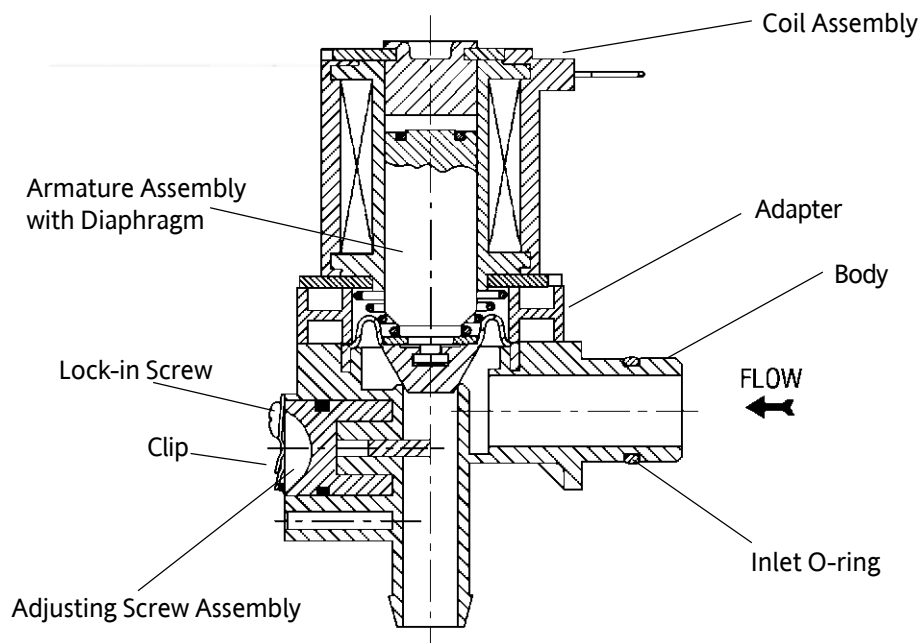

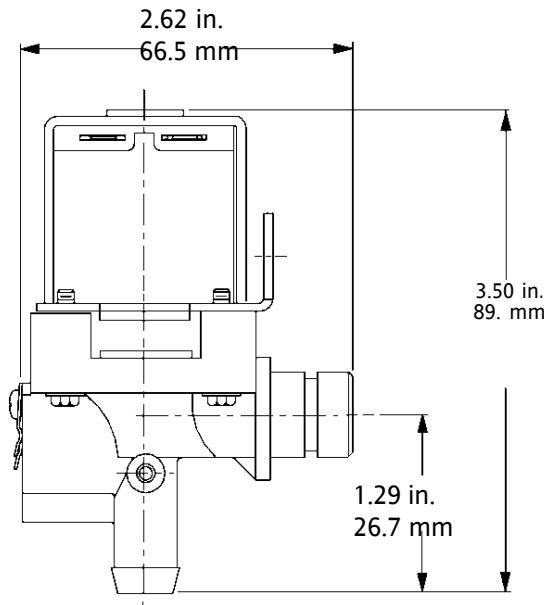

Specifications

Body Material:	Polysulfone
Diaphragm Material:	Viton, Silicone
Max Water Temp:	210°F
Flow Rate:	Up to 1.43GPM
Max Fluid Pressure:	20" Head
Electrical Connections:	1/4" Spade Terminals.
Inlet Connections:	5/8" OD w/O-Ring Groove
Outlet Connections:	1/2" ID Hose
Terminals:	1/4" Male NEMA Standard
Voltages:	24, 120, and 240 at 50/60 Hz
Heat Rise Rating:	Class A - 105°C

Information subject to change without notice.

7/99